





EU76WPVC

Series with fixed frame section and 76 mm leaf section, and panel doors, mm 76. Glass area 37 mm. Beaten wood 20 mm, coupling PVC-Wood with PVC plugs.



PROFILES	- Fixed frame: 76 mm. - Door sections: 76 mm.								
CONSTRUCTION FEATURES	Windows to a door, windows in two or more wings to flap doors, balconies to a door, balconies with two doors, sliding parallel.								
GLASS/ES AND CLADDING	The profiles provide for the incorporation of low emissivity glass having a thickness of from 33 to 37 mm.								
FLAP DOOR CAPACITY	120 kg								
THERMAL TRANSMITTANCE	Tests performed in the laboratory with the procedure described in the UNI EN ISO 1077-2 (2012).				Uf = 1,10 w/m²k				
TECHNICAL DATA									
PERMEABILITY TO AIR <small>EN-14351</small>	1	2	3	4					
WATER RESISTANCE <small>EN-1027</small>	1A	2A	3A	4A	5A	6A	7A	8A	9A
WIND RESISTANCE <small>Pressure test EN-12211</small>	1	2	3	4	5				
WIND RESISTANCE <small>Deflection</small>	A		B			C			

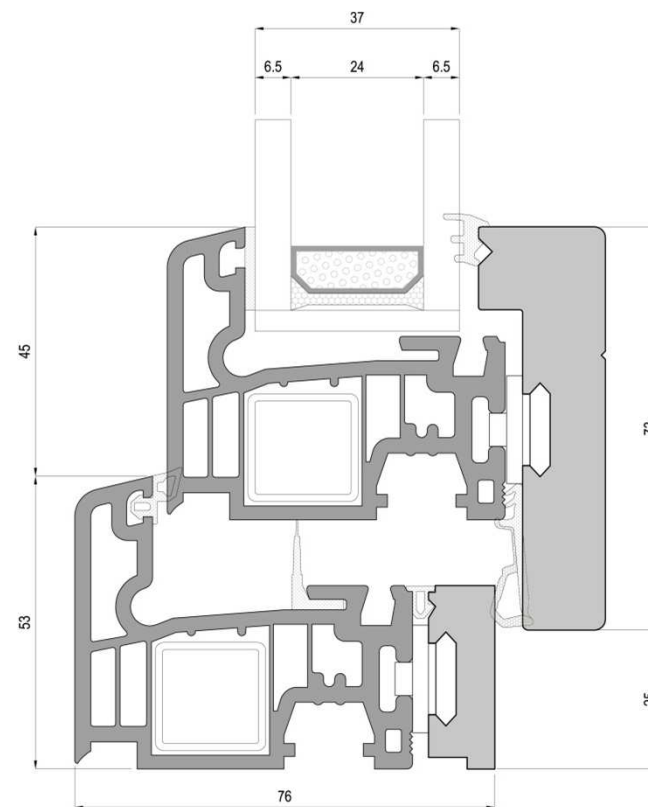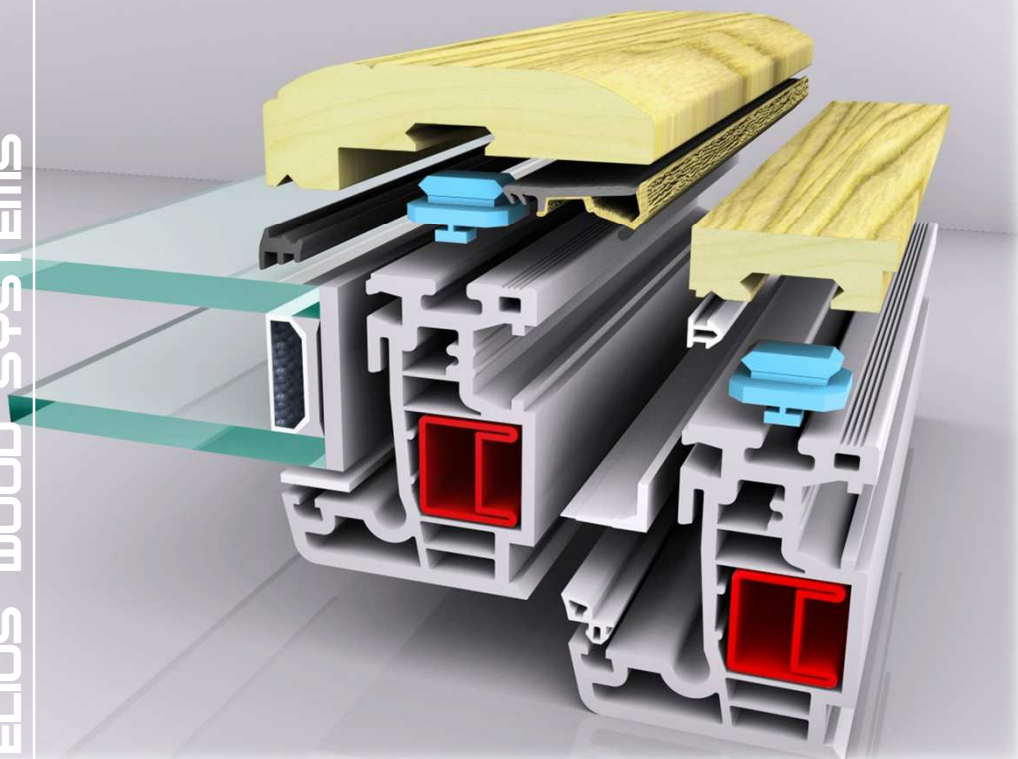

Finestra - Nodo inferiore